


# CABAIL ŁĄCZONY



## OPRAWY LED

CZ: LED svítidlo / SK: LED svetidlo / EN: LED lamp

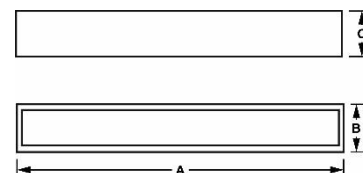

A

B



INDEX



A

B

C



0 423450 708012

	INDEX	ABC	Power	Lm	Lm/W	Tc[K]	Light fixture	A [mm]	B [mm]	C [mm]	Barcode
A	046395	Cabail LED	30 W	3000 lm	100 lm/W	4000 K	Czarny	1200	50	72,5	5902808813842
A	013336	Cabail LED	40 W	4400 lm	110 lm/W	4000 K	Černý Black	1200	50	72,5	5902808801108
B	045614	Cabail LED	30 W	3000 lm	100 lm/W	4000 K	Biały biła	1200	50	72,5	5902808809456
B	013351	Cabail LED	40 W	4400 lm	110 lm/W	4000 K	bielá white	1200	50	72,5	5902808801276

Dostępne Akcesoria:



013337 łącznik prosty



013338 łącznik kątowy czarny



013350 łącznik kątowy biały



AC 230V

SMD LED

70°

IP

IK

PF



20

06

09

≥80



Uwagi / Komentář / Komentáře

PL: Zasilacz w komplecie

CZ: Napájení je součástí dodávky

SK: Napájanie je súčasťou dodávky

EN: Power supply included

Materiał / Materiál / Material

PL: aluminium

CZ: hliník

SK: hliník

EN: aluminum

Optymalne warunki eksploatacji:

Optimální provozní podmínky:

Optimálne prevádzkové podmienky:

Optimal operating conditions:

PL: temperatura.: od -25°C do +60°C

wilgotność: <85% ciśnienie: 690-1060 hPa

CZ: teplota: od -25°C do +60°C

vlhkost: <85% tlak: 690-1060 hPa

SK: teplota: od -25°C do +60°C

vlhkost: <85% tlak: 690-1060 hPa

EN: temperature: from -25°C to +60°C

humidity: <85% pressure: 690-1060 hPa

www.bowi.com.pl

BroLux