


# CABAIL DALI




## OPRAWY LED


CZ: LED svítidlo/ SK: LED sietidlo/ EN: LED lamp

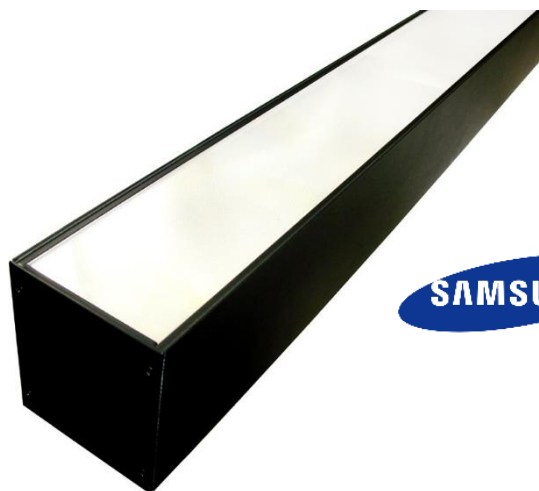

**SAMSUNG**  
LED

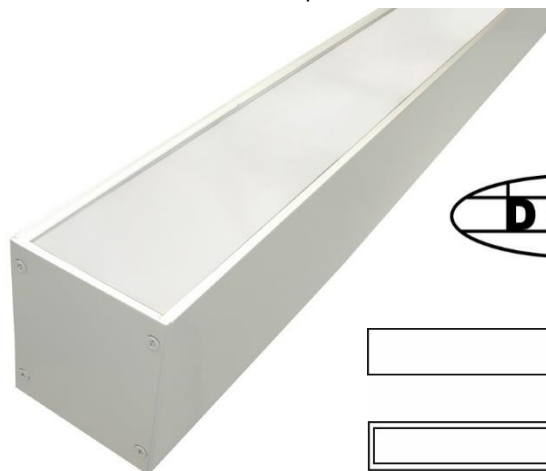

**DALI**

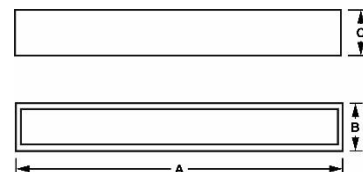

A

B



INDEX



A [mm]

B [mm]

C [mm]



0 423450 708012

	INDEX	ABC	Power	Lm	Lm/W	Tc[K]	DALI	A [mm]	B [mm]	C [mm]	Barcode
A	013766	Cabail LED	24 W	2391 lm	100 lm/W	4000 k	Czarny Černá Čierná Black	600	70	80	5902808805656
	013631	Cabail LED	40 W	4400 lm	110 lm/W	4000 K		1180	70	80	5902808805663
	013768	Cabail LED	50 W	5500 lm	110 lm/W	4000 K		1500	70	80	5902808805670
B	013767	Cabail LED	24 W	2391 lm	100 lm/W	4000 k	Biały bílá Bielá white	600	70	80	5902808805687
	013630	Cabail LED	40 W	4400 lm	110 lm/W	4000 K		1180	70	80	5902808805694
	013769	Cabail LED	50 W	5500 lm	110 lm/W	4000 K		1500	70	80	5902808805700



AC 230V



SMD LED



80°



DALI



≥80



40000 h



20



0,9



<21



Dostępne akcesoria



013564 Podsufitka oprawy liniowej Cabail okrągła biała



013565 Podsufitka oprawy liniowej Cabail okrągła czarna

Uwagi / Komentář / Komentáre

PL: Zasilacz w komplecie

CZ: Napájení je součástí dodávky

SK: Napájanie je súčasťou dodávky

EN: Power supply included

Materiał / Materiál / Materiál

PL: aluminium

CZ: hliník

SK: hliník

EN: aluminum

Optymalne warunki eksploatacji:

Optimální provozní podmínky:

Optimálne prevádzkové podmienky:

Optimal operating conditions:

PL: temperatura: od -25°C do +60°C

wilgotność: <85% ciśnienie: 690-1060 hPa

CZ: teplota: od -25°C do +60°C

vlhkost: <85% tlak: 690-1060 hPa

SK: teplota: od -25°C do +60°C

vlhkost: <85% tlak: 690-1060 hPa

EN: temperature: from -25°C to +60°C

humidity: <85% pressure: 690-1060 hPa

Brolux