

# CAEGA IP44 IP54



## PLAFONY LED


CZ: Svítidlo přisazené LED / SK: Svítidlo přisazené LED / EN: LED Ceiling light



A



B

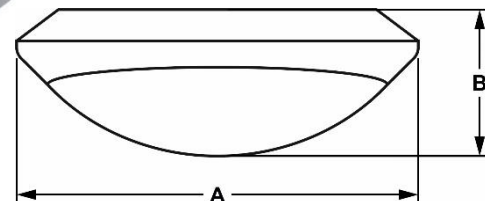

	INDEX	ABC			Tc[K]	PF		IP		A [mm]	B [mm]	
A	209	Caega LED	16 W	1200 lm	4500 K	0,9	-	54	Biały biła bielá white	296	96	5902216766822
A	008259	Caega LED	16 W	1200 lm	4500 K	0,9	Micro wave	54		296	96	5902216705791
B	208	Caega LED	16 W	1200 lm	4500 K	0,9	-	44		300	115	5902216787421
B	011582	Caega LED	16 W	1200 lm	4500 K	0,9	Micro wave	44		300	115	5902216705784



AC 230V



SMD LED



180°



80



40000 h



### Uwagi / Komentář / Komentáre

PL: Zażądanie przy świetle <30lux

CZ: Působí na okolní světlo pod 30lux

SK: Působí na okolité svetlo pod 30lux

EN: Turn on under light level of 30lux

### Uwagi / Komentář / Komentáre

PL: Wyłączenie po 20s bez ruchu

CZ: doba svícení 20s

SK: Doba svietenia 20s

EN: Turn off after 20s without motion

### Materiał / Materiál / Material

PL: Tworzywo sztuczne PC

CZ: PC Plast

SK: PC Plast

EN: PC Plastic

### Uwagi / Komentář / Komentáre

PL: Zasilacz w komplecie

CZ: Napájení je součástí dodávky

SK: Napájanie je súčasťou dodávky

EN: Power supply included

### Uwagi / Komentář / Komentáre

PL: Zasięg wykrywania ruchu max 6m (<24°C)

CZ: Maximální dosah čidla 6m (<24°C)

SK: Maximálny dosah čidla 6m (<24°C)

EN: Max. motion detection distance 6m (<24°C)

### Uwagi / Komentář / Komentáre

PL: Kąt działania czujnika 360°

CZ: Rozsah čidla pohyblu 360°

SK: Uhol činnosti pohybového čidla 360°

EN: Sensor angle 360°

