


CLEAN

PANELE LED

CZ: LED panely/ SK: LED panely/ EN: LED panel

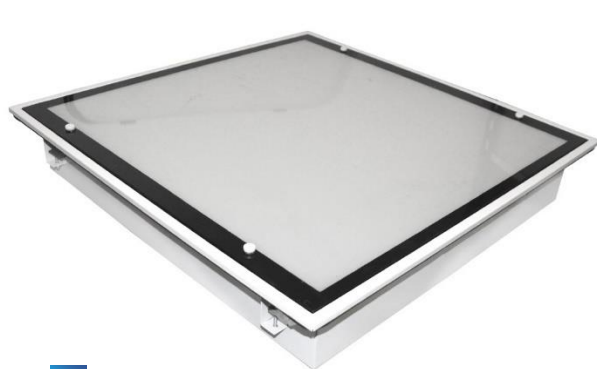


A




B



C

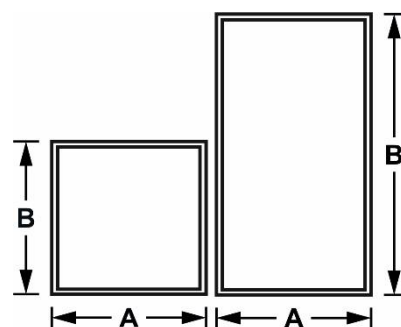

		INDEX						A	B	C	
								[mm]	[mm]	[mm]	
A		013908	Zeus LED	40 W	105lm/W	4000 K	Biały biłá white	595	595	100	5902808807926
B		013909	Posejdon LED	40 W	105lm/W	4000 K		595	595	33	5902808807933
C		013910	Hades LED	40 W	105lm/W	4000 K		595	595	33	5902808807940



AC 230V



SMD LED



120



>80



40000 h



65



Materiał / Materiál / Material

PL: aluminium

CZ: hliník

SK: hliník

EN: aluminum

Optymalne warunki eksploatacji:

Optimální provozní podmínky:

Optimálne prevádzkové podmienky:

Optimal operating conditions:

PL: temperatura.: od -25°C to +60°C

wilgotność: <85% ciśnienie: 690-1060 hPa

CZ: teplota: od -25°C do +60°C

vlhkost: <85% tlak: 690-1060 hPa

SK: teplota: od -25°C do +60°C

vlhkost: <85% tlak: 690-1060 hPa

EN: temperature: from -25°C do +60°C

humidity: <85% pressure: 690-1060 hPa

Uwagi / Komentář / Komentáre

PL: Zasilacz w komplecie

CZ: Napájení je součástí dodávky

SK: Napájanie je súčasťou dodávky

EN: Power supply included

Brolux