


MALCOLM



OPRAWY RASTER

CZ: svítidlo rastr/ SK: svietidlo raster/ EN: LED lamp raster



PHILIPS
DRIVER



INDEX	ABC →				Tc[K]		PF	A [mm]	B [mm]	
5456	MALCOLM LED	36W	4200 lm	117 lm/W	4500 K	Biały biła biely white	0.9	597	597	5902216785366
012301	MALCOLM LED	45W	5200 lm	116 lm/W	4000 K		0,9	597	597	5902216793736

AC 230V	SMD LED	75°	
80	40000 h	20	

Dostępne akcesoria



012305 Klips spring panel Malcolm



012306 Linki zestaw do panelu Malcolm

Materiał / Materiál / Material

PL: blacha stalowa

CZ: kovový výlisek

SK: kovový výlisek

EN: steel plate

Optymalne warunki eksploatacji:

Optimální provozní podmínky:

Optimálne prevádzkové podmienky:

Optimal operating conditions:

PL: temperatura.: od -10°C do +25°C

wilgotność: <85% ciśnienie: 690-1060 hPa

CZ: teplota: od -10 °C do + 25 °C

vlhkost: <85% tlak: 690-1060 hPa

SK: teplota: od -10 °C do + 25 °C

vlhkost: <85% tlak: 690-1060 hPa

EN: temperature: from -10 °C to + 25 °C

humidity: <85% pressure: 690-1060 hPa


Uwagi / Komentář / Komentáre

PL: Zasilacz w komplecie

CZ: Napájení je součástí dodávky

SK: Napájanie je súčasťou dodávky

EN: Power supply included

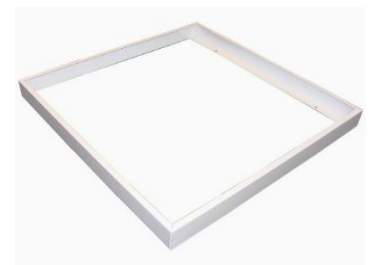

012297 Obudowa natynkowa
600x600x50mm do panelu LED Malcolm

BroLux