


TIMAN PQ UGR<19



PANELE LED

CZ: LED panely/ SK: LED panely/ EN: LED panel

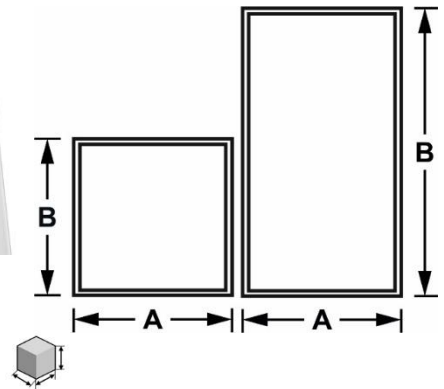

INDEX	ABC		Lm	Lm/W	Tc[K]	PF		A [mm]	B [mm]	
013143	Timan LED	40W	4159 lm	104 lm/W	3000K	>0.9	Biały biela bielá white	595	595	5902808800965
012819	Timan LED	40W	4320 lm	108 lm/W	4000K	>0.9		595	595	5902216797659
5759	Timan LED	48W	5760 lm	120 lm/W	4000K	>0.9		595	595	5902808807353
013287	Timan LED	70W	7048 lm	101 lm/W	4000K	>0.9		595	1195	5902808800958



AC 230V

SMD LED

120°



IP

IK



80

20

03



Materiał / Materiál / Material

PL: aluminium

CZ: hliník

SK: hliník

EN: aluminum

Optymalne warunki eksploatacji:

Optimální provozní podmínky:

Optimálne prevádzkové podmienky:

Optimal operating conditions:

PL: temperatura.: od -25°C do +60°C

wilgotność: <85% ciśnienie: 690-1060 hPa

CZ: teplota: od -25°C do +60°C

vlhkosť: <85% tlak: 690-1060 hPa

SK: teplota: od -25°C do +60°C

vlhkosť: <85% tlak: 690-1060 hPa

EN: temperature: from -25°C to +60°C

humidity: <85% pressure: 690-1060 hPa

Uwagi / Komentář / Komentáre

PL: Zasilacz w komplecie

CZ: Napájení je součástí dodávky

SK: Napájanie je súčasťou dodávky

EN: Power supply included

BroLux

www.bowi.com.pl