

TIMAN PQ




PANELE LED

CZ: LED panely/ SK: LED panely/ EN: LED panel



**SAMSUNG
LED**

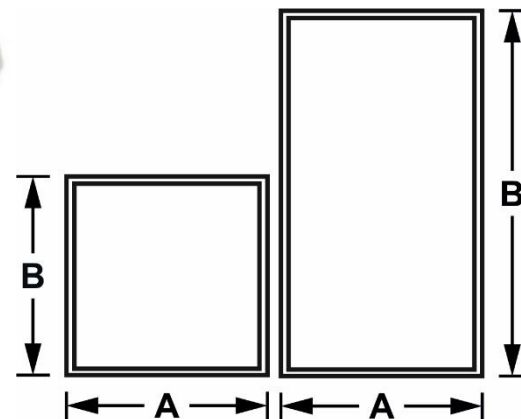

INDEX	ABC					PF		A [mm]	B [mm]	
012567	Timan LED	40 W	4056 lm	101 lm/W	3000 K	0.9	Biały bílá biely white	595	595	5902216796614
005938	Timan LED	70 W	7700 lm	110 lm/W	4000 K	0.9		595	1195	5902216709546

IP20

IP44

AC 230V	SMD LED	120°	
CRI(Ra) >80	IP 20/44	IK 03	

Uwagi / Komentář / Komentáre

PL: Zasilacz w komplecie

CZ: Napájení je součástí dodávky

SK: Napájanie je súčasťou dodávky

EN: Power supply included

Materiał / Materiál / Material

PL: aluminium

CZ: hliník

SK: hliník

EN: aluminum

Optymalne warunki eksploatacji:

Optimální provozní podmínky:

Optimálne prevádzkové podmienky:

Optimal operating conditions:

PL: temperatura.: od -25°C do +60°C

wilgotność: <85% ciśnienie: 690-1060 hPa

CZ: teplota: od -25°C do +60°C

vlhkost: <85% tlak: 690-1060 hPa

SK: teplota: od -25°C do +60°C

vlhkost: <85% tlak: 690-1060 hPa

EN: temperature: from -25°C to +60°C

humidity: <85% pressure: 690-1060 hPa

BroLux